



City Drivers - Build Relationships and STOP Back Charges



Teamed with the driver's mobile computer, the driver can measure pallets at the point of pickup and present the details to the shipper for signature. Besides providing evidence to resolve billing disputes, the dimensional data can be transferred to the carrier terminal with the other shipment data in advance of arrival. At the terminal, forklift mounted scales can record the weight of each pallet as it is moved from the incoming trailer to the outbound bay door. Cubetape is NTEP approved and optimized for both Android and Windows operating systems. Ask your dealer for factory certified evaluation applications.

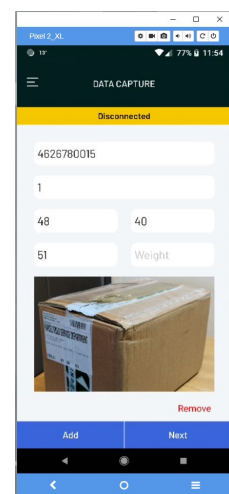

Exterior Overview

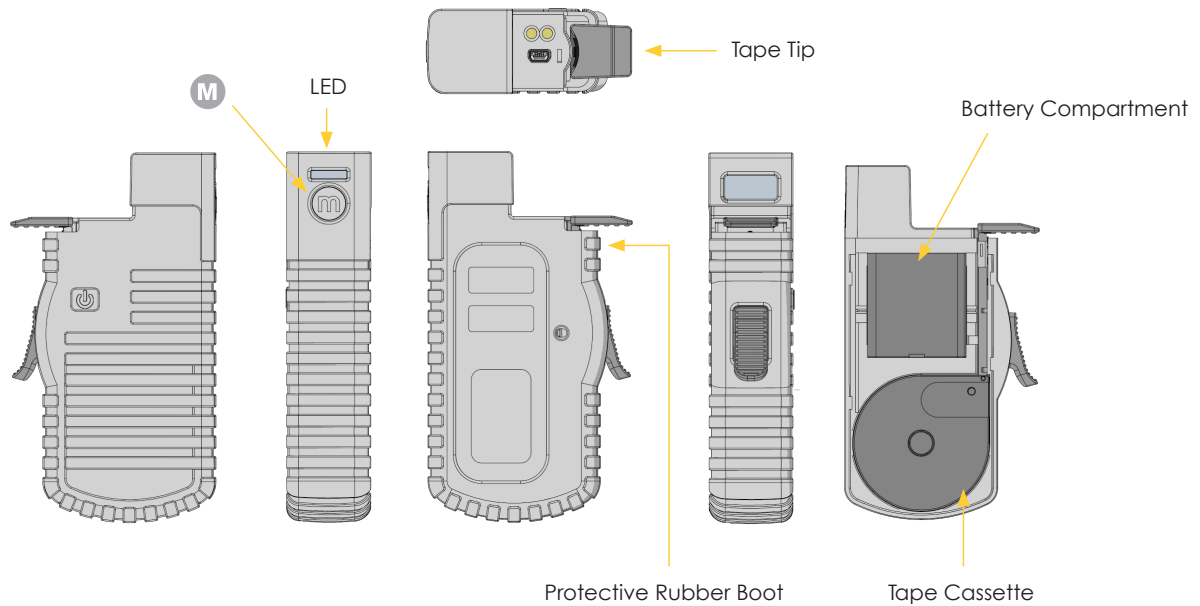

Specifications and Highlights

Measurement	<ul style="list-style-type: none"> ▶ Tape ▶ Units 	19mm X 3m (10ft), Range 5cm to 300cm US: 1/10's, 1/4's, 1/2's, nearest inch, next highest inch Metric: mm, 5mm, cm
Communications	<ul style="list-style-type: none"> ▶ Bluetooth® 	V4.0, Serial Port, HID profiles and BLE option
Power	<ul style="list-style-type: none"> ▶ Li-ion ▶ Duty Cycle 	970mAh with 2-hour recharge cycle Minimum 8 hours on heavy duty cycle
Scanner	<ul style="list-style-type: none"> ▶ 1D Optical ▶ Program 	650nm visible laser diode Common symbologies and features
Functions	<ul style="list-style-type: none"> ▶ One Button ▶ Ergonomics 	Ø/send data 2 x LEDs, buzzer
Physical	<ul style="list-style-type: none"> ▶ Dimensions ▶ Weight 	140mm x 76mm x 31mm Approximately 230g
Regulatory	<ul style="list-style-type: none"> ▶ Environment ▶ Metrology 	C-Tick, CE and FCC Certifications NTEP NMI AU MC
Other	<ul style="list-style-type: none"> ▶ Application ▶ Temperature ▶ Humidity ▶ Accessories ▶ Spares ▶ Warranty 	shipper/ tablet/PDA accessory -20°C to 50°C, 14°F to 120°F Operating: non-condensed 10% to 80% Cradle C190DSK; Tape cassette, Silicone Sleeve, Battery, 12 months excluding consumables